

Adams Profile

Finish:

Advanced Powercoat™ allows us to produce a high quality, long lasting finish, which is also environmentally friendly. Powercoat is twice the thickness and hardness of a typical baked enamel finish. Meets AAMA 2604 standards for the ultimate in durability and UV protection.

Materials:

All Ultra Signature™ Collection railing components are extruded from Ultrum™ 6005-TS alloy, with a minimum ultimate strength of 35,000 psi. Every railing system is assembled with hidden stainless steel, corrosion-resistant fasteners. Ultra Signature™ Collection posts come in a variety of thicknesses. Designer Accessories are zinc die cast aluminum. All Designer Accessories are Powercoat™ finished.

Ultra Aluminum Lifetime Warranty


Ultra Aluminum™ fence and railing products are guaranteed for life against defects in workmanship and/or materials. The Powercoat™ finish on all fencing and railing by Ultra Aluminum™ is guaranteed for life against cracking, peeling or chipping. Visit our website for more information and a copy of the warranty.

Environmentally Responsible


Ultra Aluminum™ is proud to use recycled aluminum in our products. Aluminum is the most commonly recycled metal in the world. Our Powercoat™ coating process is environmentally friendly and virtually pollution-free.




Design Options




UAR-200-2R Two Rail




UAR-270-3R Three Rail




UAR-200-3R Three Rail




UAR-220-3R Three Rail



UAR-250-3RS Three Rail with Spears



UAG-200-2R Glass Railing




UAG-270-3R Glass Railing

Railing Specifications

Components	Post-To-Post
Square Picket	¾" Sq. x 0.050" Thickness
Top Cap Adams	1.646"H x 1.716"W 0.080" Thickness
Bottom Rail	1.320"H x 1.352"W 0.070" Thickness
Boss Screw Posts	2½" x 2½" x 0.100" 3" x 3" x 0.125"
Spacing Between Pickets	3⅝"
Post Spacing	4' -- 48.25" 6' -- 70.50" 8' -- 97.25"
Heights Available	37" and 43"
Signature Columns	6" x 6" Square 0.100" Thickness
	8" x 8" Square 0.100" Thickness



Colors shown represent an approximate comparison and may vary slightly from actual product color.

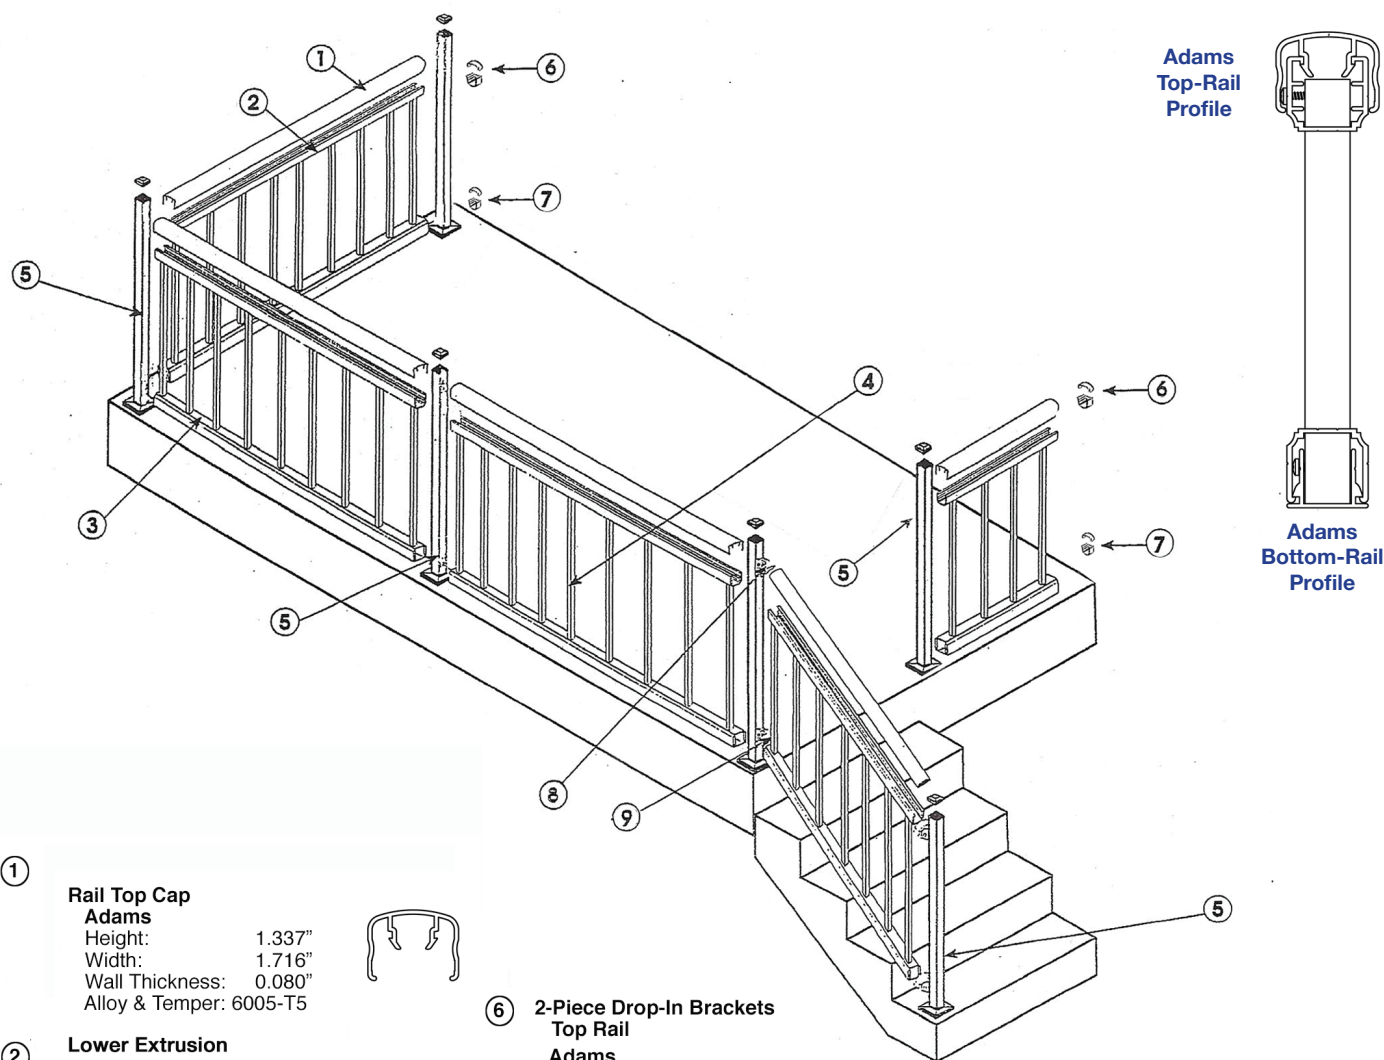

①

Rail Top Cap

Adams

Height: 1.337"
Width: 1.716"
Wall Thickness: 0.080"
Alloy & Temper: 6005-T5



②

Lower Extrusion for Top Rail

Height: 1.235"
Width: 1.352"
Wall Thickness: 0.070"
Alloy & Temper: 6005-T5



③

Bottom Rail

Height: 1.375"
Width: 1.375"
Wall Thickness: 0.070"
Alloy & Temper: 6005-T5



④

Square Picket

Wall Thickness: 0.050"
Alloy & Temper: 6005-T5

⑤

Post

2 1/2" Sq. x 2 1/2" Sq.
Wall Thickness: 0.100"
Alloy & Temper: 6005-T5
3" Sq. x 3" Sq.
Wall Thickness: 0.125"
Alloy & Temper: 6005-T5

⑥

2-Piece Drop-In Brackets Top Rail

Adams

Wall Thickness: 0.200"
Alloy & Temper: A-360

⑦

2-Piece Drop-In Brackets Bottom Rail

Adams

Wall Thickness: 0.200"
Alloy & Temper: A-360

⑧

Adjustable Rail End Vertical or Horizontal Top Rail

Wall Thickness: 0.200"
Alloy & Temper: A-360


⑨

Adjustable Rail Ends-Vertical or Horizontal Bottom Rail

Wall Thickness: 0.200"
Alloy & Temper: A-360

Dimensions

Height	A	B	Panel Hgt.
37"	6"	28"	35"
43"	6"	34"	41"

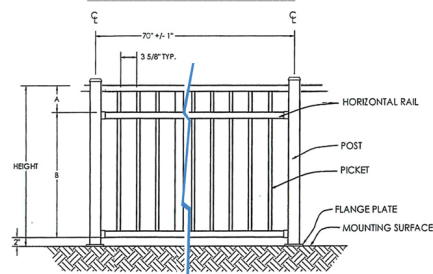

ULTRA
FENCING • RAILING

UltraRailing.com | 800-656-4420

